


Modification Airmate (stereo AUX) from 220V to 110V

The following picture displays the 220V wiring. Green and White are connected to each other and Red and Yellow are connected to connector J1.

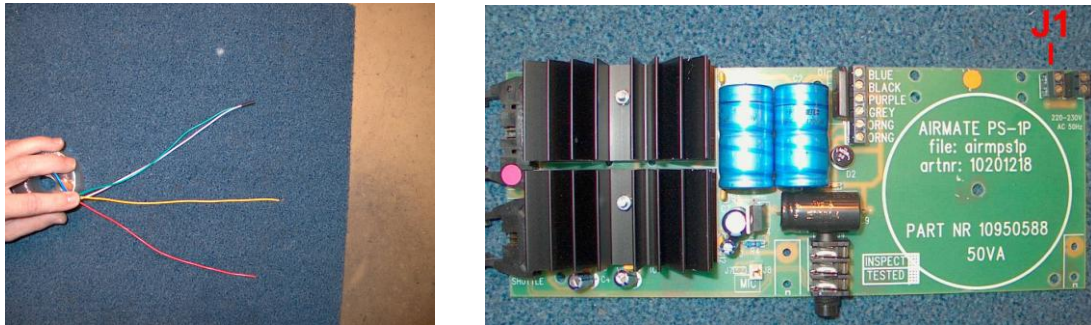

To modify the power-supply there are two necessary steps to follow.

- 1) The power-cabling to the transformer needs to be rerouted.
- 2) The fuse needs to be replaced.

Step 1; Rerouting the power-cabling.

Twist the Green and the Red wire together. Twist the White and the Yellow together.

ATTENTION: DO NOT SOLD THE WIRES TOGETHER

Then connect both wires to the connector J1.



The red indicator (arrow) specifies the point (2 holes) where the wires need to be mounted to the Print Circuit Board with a tie-wrap.

Step 2; Replacing the fuse.

The fuse-box is integrated in the AC socket. The fuse must be replaced from a 0.5A to a 1A.

Make sure the 220V marking on the fuse-holder is on TOP!!! Else the device will not function.

