


Operational & Service Manual Studio Remote mk4

USERS MANUAL

Version 1.02

Studio Remote Control MK-4

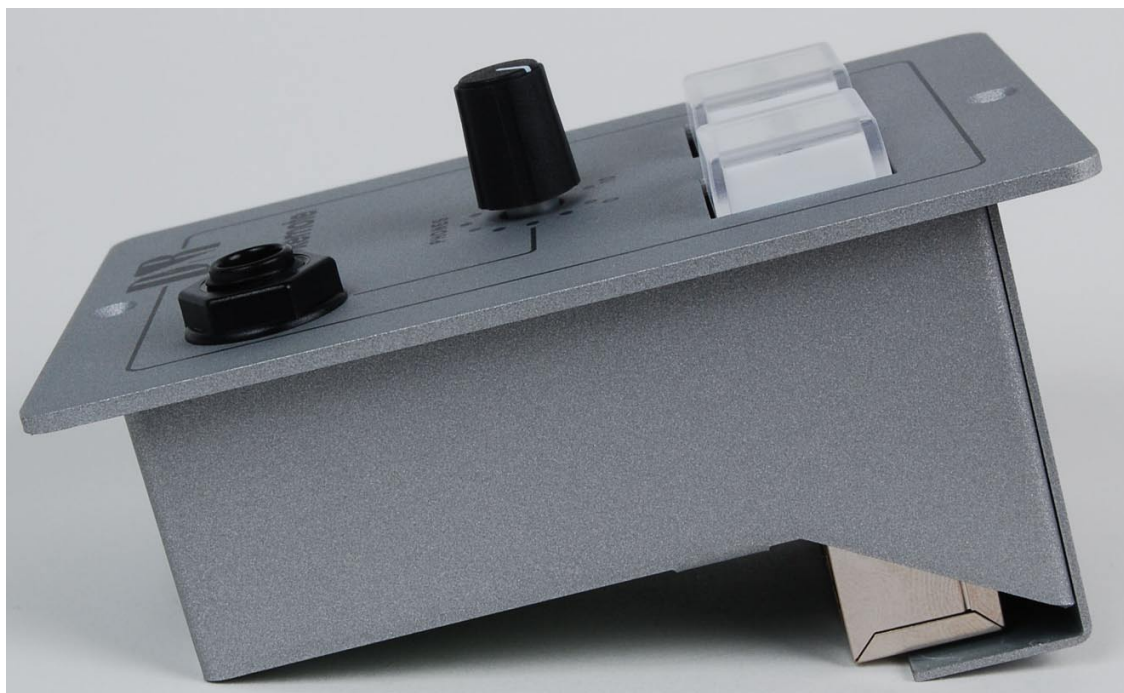

Remote/Mic Breakout and Headphones amplifier

for

AXUM | AIRMAX | AIRLAB | AIRMATE

Operational & Service Manual Studio Remote mk4

Dear Customer,

Thank you for choosing the Studio remote-Unit mk4 remote and headphones-amplifier.


The Studio remote-Unit mk4 is designed by specialists in the field of radio broadcast and is intended to be used together with the broadcast consoles of D&R Electronica.

This time you are not faced with a huge manual because it is simply not necessary because of the natural recognition of all functions on the user interface. All functions are self-explanatory and you will certainly appreciate the ergonomics of this design. No digital layering just direct access to all relevant functions, as we think it should be in daily practice

We always value suggestions from our clients, and we would therefore be grateful if you could send us your comment and/or suggestions, once you have become familiar with your Studio remote-Unit mk4. We will certainly learn from your comments, and we will very much appreciate the effort and time it will take for you to communicate your ideas and suggestions.

We are confident that you will be using the Studio remote-Unit mk4 for many years to come, and wish you a lot of success.

With kind regards,

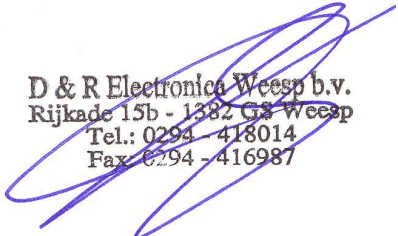

D & R Electronica Weesp b.v.
Rijkade 15b - 1382 GS Weesp
Tel.: 0294 - 418014
Fax: 0294 - 416987

Duco de Rijk
PRESIDENT

D&R ELECTRONICA WEESP B.V.
Rijkade 15B
1382 GS WEESP-HOLLAND
The Netherlands
Phone: +31 (0)294-418 014
Fax: +31 (0)294-416 987
Website: <http://www.d-r.nl>
E-mail: info@d-r.nl

Operational & Service Manual Studio Remote mk4



STUDIO REMOTE UNIT MK4.

The Studio Remote Unit is designed to be the remote and communication interface between the mixing console and the announcer or guest. It has a built in headphone amp and 2 remote switches with RED/GREEN LED indication. The Studio Remote is the perfect solution for headphones amplifier, CHOUGH/COMMUNICATION button for announcer and/or guest and a Mic connection. The unit can be connected directly to the D&R Axum Airlab and Airmate. The only difference is another back panel PCB. We shall describe all functions in detail now.

AXUM | AIRMAX



REMOTE/SIGNALLING IN MIC MODE.

This useful feature has three important functions:

1. Remote Switch for Cough or Talkback or communication for showing Mic-On Red Light etc.
2. Direct Mic Connection, XLR to RJ 45
3. Headphones Amplifier is switchable between A and B

A shielded cat5 cable has to be connected between the Studio remote Unit and the AirMax/Axum mic-input channel that needs communication. Together with the remote control also the Mic-input is directly connected.

Using the push-button during broadcast, the announcer can temporarily mute the microphone in order to cough (where the name comes from). At the same time his microphone will be routed to the Cue system, in order to give her/him the opportunity to communicate with the engineer/producer.

HEADPHONES INPUT (audio inputs 2x RJ45 parallel)

Wiring for the D&R AXUM

The Audio-input RJ45 of the Studio remote Unit needs to be wired to the Axum or AirMax. On the RJ45 connector 2 stereo-pairs of audio can be connected. The pushbutton switch beneath the front panel in between the Cough and Com switches determine whether you listen to A or B. (only for AXUM | AIRMAX)

Operational & Service Manual Studio Remote mk4

The Audio-Input-thru RJ45 can be used to connect more Studio remote-Units to the same Audio Input (parallel). Always use shielded cat5 cable to prevent hum.

The shield is also ground of the signal.

Power-Jack:

Connect the external power-supply (+ 9 to 12 volt) to the Power-Jack connector.

Be careful, only use the standard D&R Studio remote-Unit power-supply that is part of the delivery.


When in doubt ask your local D&R dealer or a qualified technician.

Do not connect a wrong or damage power-supply to the Studio remote-Unit to prevent you from electric shocks.

Always use a Class II power supply (without earth pin, double isolated).

TECHNICAL DETAILS OF CONNECTORS AND LEVELS

Phones (Stereo Jack, front)		
Tip	Phones Left	> 16 Ohm
Ring	Phones Right	> 16 Ohm
Sleeve	GND	
150mW in to 16 Ohm		
75mW in to 32 Ohm		
45mW in to 64 Ohm		

Power Jack (back side) 9V DC 100mA Class II power (without earth pin)	 9 to 15 Volts DC	
Centre pin	+9V	9 to 12 V DC
Ring	GND	
<i>The Power Jack is protect against reverse polarity connection.</i>		

Audio Input 1/2 (both headphone RJ45 are connected in parallel.)		
pin	name	
1	1A	Audio-Input 1 Left, Connect to internal jumpers.
2	1B	Audio-Input 1 Right, Connect to internal jumpers.
3	2A	Audio-Input 2 Left, Connect to internal jumpers.
4	3B	nc
5	3A	nc
6	2B	Audio-Input 2 Right, Connect to internal jumpers.
7	4A	nc
8	4B	nc
shielding	Audio GND	
<i>Always use shielded cat5 cable to prevent hum.</i>		
<i>The pin-out is equal to the D&R AirMax and D&R Axum RJ45 audio connections.</i>		

AIRLAB | AIRMATE

REMOTE/SIGNALLING IN MIC MODE.

This useful feature has three important functions:

1. Remote Switch for Cough
2. Remote switch for Talkback or communication and showing Mic-On Red Light etc.
3. Headphones Amplifier.



Using the push-button during broadcast, the announcer can temporarily mute the microphone in order to cough (where the name comes from).

At the same time his microphone will be routed to the Cue system, in order to give her/him the opportunity to communicate with the engineer/producer.

HEADPHONES INPUT (audio jack input)

The Audio-jack connector of the Studio remote Unit need to be wired to the master of the Airmix/Airlab, Guest or Announcer outputs or whatever suits your purpose mostly.

A wiring schematic will be shown in this manual on another page.

Power-Jack:

Connect the external power-supply (+ 9 to 12 volt) to the Power-Jack connector.

Be careful, only use the standard D&R Studio remote-Unit power-supply that is part of the delivery. When in doubt ask your local D&R dealer or a qualified technician.

Do not connect a wrong or damaged power-supply to the Studio remote-Unit to prevent you from electric shocks. Always use a Class II power supply (without earth pin, double isolated).

EG Declaration of Conformity

We, D&R Electronica Weesp B.V.
Rijnkade 15b
1382S Weesp
The Netherlands


Herewith take the sole responsibility to confirm that this product:

Type designation : **Studio remote-Unit mk4 (2012)**
Kind of equipment : **Remote and Headphones-Amplifier**

Which refers to this declaration, is in accordance with the following standards or standardized documents:

EMC Directive 89/336/EEG, norm EN55103-1 (E2) EN55103-2 (E2)

Low Voltage Directive 73/23/EEG, norm EN60065



D & R Electronica Weesp b.v.
Rijnkade 15b - 1382 GS Weesp
Tel.: 0294 - 418014
Fax: 0294 - 416987

Duco de Rijk
President

D&R Electronica Weesp B.V.

January 2012
Weesp

Disclaimer:

Due to a policy of continuous product improvement, D&R Electronica Weesp B.V reserves the right to change specifications, appearance and performance without prior notice.

Since the use of this information, and the conditions by which the products are used are beyond the control of D&R Electronica Weesp B.V, it is the obligation of the owner and/or the equipment operator to determine the correct and safe selection, settings and conditions of use of the equipment and products.

To the extent that the law permits, any liability which may be incurred as a result of the use or future use of a product manufactured or sold by D&R Electronica Weesp B.V is limited to the cost of repairing or replacing the failed product or component at the discretion of D&R Electronica Weesp B.V, either within, or outside of warranty period, and does not extend to any loss or damage which may be caused as a consequence of misuse or failure of the equipment or products.

D&R Electronica Weesp B.V shall not in any event be liable for economic loss of profits including without limitation any incidental or consequential damage, expenses or other damages arising out of the use or inability to use the product and/or software even if D&R has been advised of the possibility of such a damage or for any claim by another party.

You agree to indemnify, hold harmless, and defend D&R Electronica Weesp B.V., its parent, and their licensors, suppliers, officers, directors, employees, agents, affiliates, subsidiaries (collectively "Indemnified Parties") from and against any and all liability incurred by or made against the Indemnified Parties in connection with any claim arising from or related to your use.

Duco de Rijk
president