

TELEPHONE HYBRID-1

USER MANUAL

V.1.02



Smart in Solutions


Dear Customer,

Thank you for choosing the Telephone Hybrid-1.

This time you are not faced with a huge manual because it is simply not necessary because of the natural recognition of all functions on the user interface.
All functions are self-explanatory and you will certainly appreciate the ergonomics of this design.

We are confident that you will be using the Telephone Hybrid-1 for many years to come, and wish you a lot of success.

With kind regards,

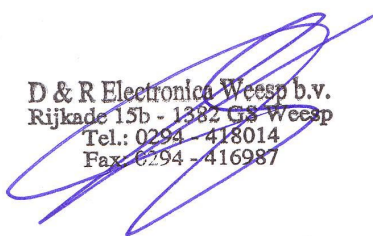

D & R Electronica Weesp b.v.
Rijkade 15b - 1382 GS Weesp
Tel.: 0294 - 418014
Fax: 0294 - 416987

Duco de Rijk
PRESIDENT

D&R ELECTRONICA WEESP B.V.
Rijkade 15B
1382 GS WEESP-HOLLAND
The Netherlands
Phone: 0294-418 014
Fax: 0294-416 987
Website: <http://www.d-r.nl>
E-mail: info@d-r.nl

What is a Telephone hybrid?

Telephone hybrids provide the interface between professional audio equipment and the public telephone network. They provide protection for your equipment and the public telephone lines, allowing for varying line signals and line conditions. Automatically canceling out the unwanted signal they also facilitate two-way communication down a single telephone line.

Each hybrid has a telephone line connection, a handset connection and separate connectors for audio input and output from a broadcast mixer, or other professional audio source.

A large proportion of D&R hybrids are used in radio and television broadcasting applications allowing external callers to be connected to the studio mixing console. Most of the other units are supplied to communication operations allowing extremely effective conversion between 4-wire audio circuits and standard telephone lines.

Specs:

Output: balanced mic level - 30db.

Input: Line level 0 dBu balanced.

R/C balance: fully adjustable

Separation: more than 30db.

Front panel lay-out



| | |
|------------------------|--|
| C-BALANCE | 12 pole rotary switch to select the optimum side tone attenuation. |
| R-BALANCE | Internal potentiometer to adjust for optimum side tone attenuation. |
| TO CALLER | Switch to temporarily connect the line (wall) connector to the Phone connector (appliance) to be able to dial and make a connection. |
| ON-LINE CONNECT | Line connect switch to connect and disconnect calls from the telephone line. |

Back panel lay-out



| | |
|-----------------------------|---|
| PHONE: | RJ-11 connector to connect with a handset. |
| LINE (wall) | RJ-11 connector to connect with the public telephone network. |
| TO MIC INPUT | Stereo jack output to be connected to Mic input of the mixer. |
| TO CLEANFEED OPUTPUT | Stereo jack input to be connected to Mix Minus/Clean feed (N-1)output of the mixer. |

USER MANUAL

The D&R Telephone Hybrid-1 is designed to create an easy connection between the public telephone line and your studio equipment.

The Hybrid has to be inserted between your telephone and the telephone line. Connect the two wires of the telephone line's wall unit to the RJ-11 connector labeled LINE (wall) and connect the telephone appliance itself to the Hybrid's phone output on the RJ-11 connector labeled PHONE. This can be done with standard available cable assemblies from your local phone shop.

Now the Hybrid is interfaced (fully balanced) between your telephone appliance and its connection to the outside world. The hybrid can now split the send and return signals.

Now connect the hybrid's balanced audio input labeled **TO CLEANFEED OUTPUT** to a (preferable) balanced output of around +4dBu. This output has to be the mix of all signals except the signal coming from the hybrid itself to avoid feedback.

An Aux. output on your mixer will do as well as long as you keep the Aux. send of the channel you return the phone signal on closed (all other Aux. sends need to be open), or in broadcast mixers a clean-feed is the best.

The Hybrid-1 stereo jack connector labeled **TO MIC INPUT** has to be connected to a Mic level input of your mixing console.

NOTE: The output of the Hybrid has to be connected to a Mic input of the mixing console, because the outgoing level is very low because of the passive circuitry inside the Hybrid.

WIRING SCHEME

| | |
|-----------------------------|---|
| PHONE: | RJ-11 connector to connect with a handset. |
| LINE (wall) | RJ-11 connector to connect with the public telephone network. |
| TO MIC INPUT | Stereo jack output to be connected to mic input of the mixer. |
| TO CLEANFEED OPUTPUT | Stereo jack input to be connected to Mix Minus/Clean feed (N-1)output of the mixer. |

CONNECTION WIRING OF BOTH PHONE AND LINE RJ-11 CONNECTORS

| PHONE/WALL RJ-11 | FUNCTION | CONNECTION |
|------------------|--------------------|------------|
| Pin 1 | n.c. | |
| Pin 2 | A (telephone line) | In/out |
| Pin 3 | B (telephone line) | In/out |
| Pin 4 | n.c. | |

WIRING OF AUDIO IN AND OUTPUTS

| STEREO JACK TO MIC INPUT / TO CLEANFEED OUTPUT | TYPE | CONNECTION |
|--|------------------|--------------|
| Screen | Screen (ground) | Audio ground |
| Tip | Phase (hot) | Audio + |
| Ring | Non-phase (cold) | Audio - |

SPECIFICATIONS

Audio Inputs


| TO CLEANFEED OUTPUT | |
|-----------------------|----------------------------------|
| Impedance | 10k Ohm, electronically balanced |
| Common mode rejection | >30dB |
| Maximum input level | +26dBu |
| Nominal input level | +4 dBu |
| Frequency response | 20Hz – 15kHz |
| Connectors | STEREO JACK |

| TO MIC INPUT | |
|--------------------------------|--|
| Impedance | < 50 Ohm, electronically balanced |
| Common mode rejection | >30dB |
| Maximum output level | -20dBu |
| Nominal output level | +4 dBu |
| Bandwidth to telephone line | 250Hz – 4kHz, -3dB ref 1 kHz |
| Telephone line impedance | Nominally 600 ohm |
| Telephone line impedance range | 300 ohm to 1500 ohm |
| Connectors | STEREO JACK |
| | |
| GENERAL | |
| Distortion | Less than 0.1% (0dBu out) |
| Power supply | PASSIVE |
| Power consumption | NONE |
| Dimensions | 1 HE front panel: 482x44mm |
| | Frame: 240x44x175mm (width x height x depth) |
| Weight | 1.5 kg net including packing |

AUDIO CONNECIIONS TELEPHONE HYBRID TO OUR AIRMATE OR ANY MIXER

AIRMATE

TELEPHONE HYBRID

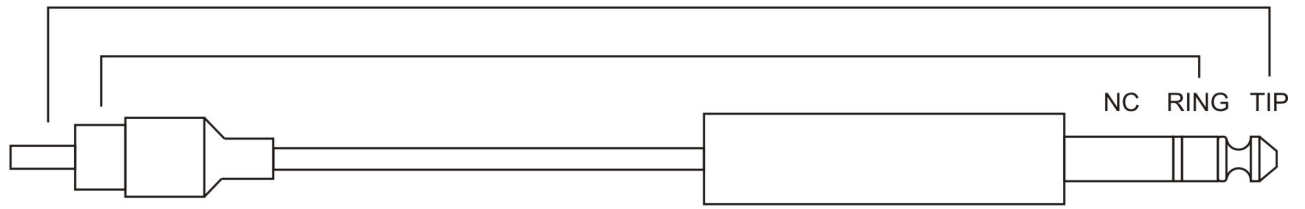

Cinch connector
Left cleanfeed output


Jack connector
Cleanfeed input

Tip = Hot
Ring = Colt
Shield = Not connected

Cleanfeed output could also be an AUX send output!

AIRMATE channel 8

TELEPHONE HYBRID

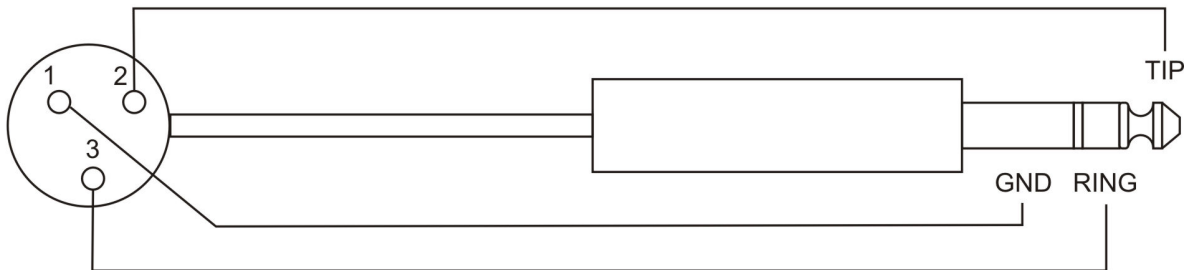

XLR connector
Microphone input

Jack connector
Hybrid mic. level output

1 = Ground
2 = Hot
3 = Cold

Tip = Hot
Ring = Colt
Shield = Ground

SETTING UP PROCEDURE

Push the "to caller" switch and leave the "connect" switch in the up position. Now dial the caller to whom you want to talk. If this connection is made you connect the caller to the mixing console by pushing the connect switch.

Now listen by means of a PFL (CUE) switch on your mixer to the caller and adjust while talking the C and R balance so that the outgoing signal (your voice) is best attenuated.

A practical start is to put the C balance on number 7 and the R balance on 5. Carefully adjusting afterwards can be realized by slowly adjusting the R balance for optimum attenuation. This is the basic setting for most of your calls, because the line balancing to your own telephone station has to be performed one time only, when no changes are made to the telephone system in your place. The maximum attenuation will be around 22 to 26 dB.

The function of the "Connect" switch is to connect the hybrid to the telephone line instead of the phone itself (which is now switched off). The led indicates that a connection has been made.

The function "to caller" is there to disconnect the outgoing signal to the caller for private discussions

Declaration of Conformity

volgens ISO/IEC leidraad 22 en EN 45014

Name Manufacturer D&R Electronica Weesp b.v.
Address Manufacturer Rijnkade 15B, 1382 GS Weesp,
The Netherlands

declares that the product

Name product TELEPHONE HYBRID-1
Model nummer HYBRID
Product options All

Complies with the following product specifications:

Security EN 60950: 1988 +A1, A2

EMC: CISPR-22: 1985 / EN 55022: 1988 klasse B (*)
EN 50082-1: 1992
IEC 801-2:1991 / prEN 55024-2:1992 - 3kV CD, 8kV AD
IEC 801-3:1984 / prEN 55024-3:1991 - 3 V/m
IEC 801-4:1988 / prEN 55024-4:1992 - 0.5kV signal cables,
1 kV power cables.

Additional info:

The product complies herewith to the following rules

Low voltage 73 / 23 / EEG
EMC-rules 89 / 336 / EEG.

(*) The product has been tested in normal users conditions.

PRODUCT SAFETY

This product is manufactured with the highest standards and is double checked in our quality control department for reliability in the "HIGH VOLTAGE" section.

CAUTION

Never remove any panels, or open this equipment. No user serviceable parts inside. Equipment power supply must be grounded at all times.

Only use this product as described, in user manual or brochure.

Do not operate this equipment in high humidity or expose it to water or other liquids. Check the AC power supply cable to assure secure contact.

Have your equipment checked yearly by a qualified dealer service center.

Hazardous electrical shock can be avoided by carefully following the above rules.

PLEASE READ THE FOLLOWING INFORMATION

Especially in sound equipment on stage the following information is essential to know.

An electrical shock is caused by voltage and current, actually it is the current that causes the shock. In practice the higher the voltage the higher the current will be and the higher the shock. But there is another thing to consider and it is resistance.

When the resistance in Ohms is high between two poles, the current will be low and vice versa.

All three of these; voltage, current, and resistance are important in determining the effect of an electrical shock.

However, the severity of a shock primarily determined by the amount of current flowing through a person.

A person can feel a shock because the muscles in a body respond to electrical current and because the heart is a muscle it can affect, when the current is high enough.

Current can also be fatal when it causes the chest muscles to contract and stop breathing. At what potential is current dangerous. Well the first feeling of current is a tingle at 0.001 Amp of current. The current between 0.1 Amp and 0.2 Amp is fatal.

Imagine that your home fuses of 20 Amp can handle 200 times more current than is necessary to kill. How does resistance affect the shock a person feels.

A typical resistance between one hand to the other in "dry" condition could well over 100,000 Ohm.

If you are playing on stage your body is perspiring extensively and your body resistance is lowered by more than 50%. This is a situation in which current can easily flow.

Current will flow when there is a difference in ground potential between equipment on stage and in the P.A. system. Please do check if there is any potential between the housing of the mikes and the guitar synth amps, which will be linked by your body on stage. Imagine, a guitar in your hand and your lips close to the mike! A ground potential difference of above 10 volts is not unusual, in improperly wired buildings it can possibly be as high as 240 volts.

Although removing the ground wire sometimes cures a system hum, it will create a very hazardous situation for the performing musician.

Always earth all your equipment by the grounding pin in your mains plug.

Hum loops should be only cured by proper wiring and isolation input/output transformers.

Replace fuses always with the same type and rating after the equipment has been turned off and unplugged.

If the fuse blows again you have an equipment failure, do not use it again and return it to your dealer for repair.

And last but not least be careful not to touch a person being shocked as you, yourself could also be shocked.

Once removed from the shock, have someone send for medical help immediately

Always keep the above mentioned information in mind when using electrically powered equipment.

TELEPHONE HYBRID

SERVICE MANUAL

D & R Electronica Weesp BV (SERVICE-MANUAL)
 Comp: 100 60898508 Telephone Hybrid-1e 9.5"

| Articlecode | Description | Quantity | Unit |
|-------------|-------------------------------------|----------|------|
| 10250345 | Bridge rectifier B80C1000 (round) | 1.0000 | st |
| 10400233 | Condensator ker 560p R2.5 | 1.0000 | st |
| 10400234 | Condensator ker 680p R2.5 | 1.0000 | st |
| 10400235 | Condensator ker 820p R2.5 | 1.0000 | st |
| 10401246 | Condensator poly 1n0 R5.0 | 1.0000 | st |
| 10401247 | Condensator poly 1n5 R5.0 | 1.0000 | st |
| 10401248 | Condensator poly 2n2 R5.0 | 1.0000 | st |
| 10401249 | Condensator poly 3n3 R5.0 | 1.0000 | st |
| 10401250 | Condensator poly 4n7 R5.0 | 1.0000 | st |
| 10401251 | Condensator poly 6n8 R5.0 | 1.0000 | st |
| 10400278 | Condensator poly 8n2 R5.0 | 2.0000 | st |
| 10401253 | Condensator poly 10n R5.0 | 1.0000 | st |
| 10400273 | Condensator poly 12n R5.0 | 1.0000 | st |
| 10401263 | Condensator poly 180n R5.0 | 1.0000 | st |
| 10400280 | Elco 2.2uF / 50V radiaal R5.0 | 1.0000 | st |
| 10400293 | Elco 220uF / 63V radiaal R5.0 | 2.0000 | st |
| 10400281 | Elco 4.7uF / 50V radiaal R5.0 | 1.0000 | st |
| 10600432 | Jack chassis break | 2.0000 | st |
| 10600445 | Conn Chass 805-D 4p (RJ11) | 2.0000 | st |
| 10300791 | Potm 12 1x1KA lin | 1.0000 | st |
| 10200530 | PCB Telephone-hybrid-C | 1.0000 | st |
| 10550400 | Switch Alps 2p-ns (2 x om) | 1.0000 | st |
| 10550963 | Switch Alps 4p-sh (4 x om) | 1.0000 | st |
| 10550315 | Switch rotary 1 x 12 | 1.0000 | st |
| 10950018 | Transformer LM-NP-1003-B (PTT line) | 2.0000 | st |
| 10350517 | Resistor 0E 5% 1/4W | 1.0000 | st |
| 10350718 | Resistor 120E 5% 1/4W | 1.0000 | st |
| 10350792 | Resistor 604E 1% 1/4W | 2.0000 | st |
| 10350728 | Resistor 820E 5% 1/4W | 1.0000 | st |
| 10250351 | Zenerdiode 5V6 / 400mW | 2.0000 | st |
| 10700631 | Cap 11.0mm rond zwart | 1.0000 | st |
| 10700665 | cap 14.7mm (12.7x11.3)gat | 1.0000 | st |
| 10450195 | cap SiFam 11mm gray bulk | 2.0000 | st |
| 10700975 | Tape 12mm dun | 20.0000 | cm |
| 10100371 | Front 9.5" Telephonehybrid/E | 1.0000 | st |
| 10500084 | Isolation panel 9.5" randapp.PVC | 1.0000 | st |
| 10600436 | Jack Nut | 4.0000 | st |
| 10700685 | Washer M 10 potmeter dun | 2.0000 | st |
| 10150093 | Frame 9.5" 1HE version D | 1.0000 | st |
| 10450253 | Knob Pushbutton 3.3 grey-square | 2.0000 | st |
| 10450104 | Knop SiFam grey D-shaft(11mm) | 2.0000 | st |
| 10250387 | Led 3mm red SLR-03A510-020 | 1.0000 | st |
| 20850531 | PCB inserted Telephonehybrid | 1.0000 | st |

| Articlecode | Description | Quantity | Unit |
|-------------|--------------------------------|----------|------|
| 10700790 | Taptite M3x6 verzkop/pozidr/zw | 4.0000 | st |
| 10800924 | Packaging 9.5" | 1.0000 | st |
| 10800956 | Foamblock 9.5" | 2.0000 | st |
